


LVI 莱维®
Create Beautiful Lighting

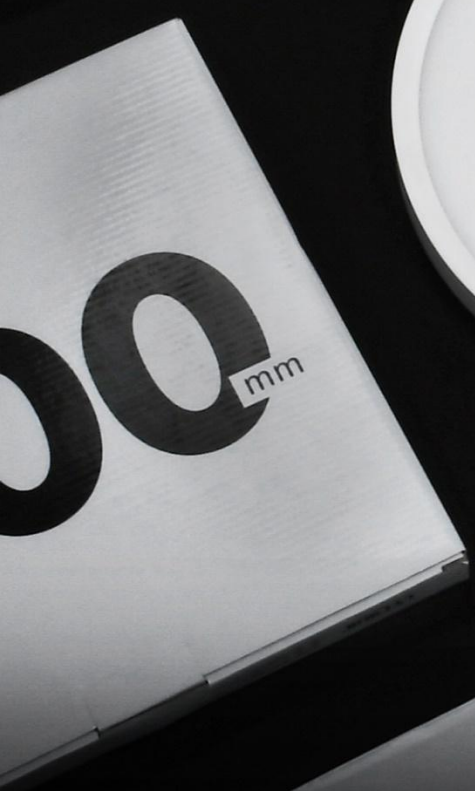

LIONWAY ELECTRONICS CO.,LIMITED

Since 2008 Specialized in LED products
focus on high quality LED lighting.

The company is a national high-tech enterprise, certified through the ISO9001:2008 quality management system & ISO14001:2004 environmental protection system.

We have also received ELT, DLC, FCC, 3C, CE and ROHS approval and so on.

The company has optical laboratory, constant temperature and humidity testing equipment, vibration testing equipment, etc., providing a powerful driving force for product development.

We have product design department, mold development department, injection molding workshop, lighting automatic manufacturing workshop, committed to providing strong advantages of lighting products.

Our lighting Sold to many countries and in the international market has made a good international reputation.





CERTIFICATE

IEC

IECEE

CB

SCHEME

Ref. Certif. No.

DS 2-026660

IEC SYSTEM FOR MUTUAL RECOGNITION OF TEST CERTIFICATES FOR ELECTRICAL EQUIPMENT (IECEE) CB SCHEME

CB TEST CERTIFICATE

Product

Surface Ceiling light

Name and address of the applicant

LIONWAY ELECTRONICS CO., LIMITED
NO. 120, MinSheng Road, Shangcun,
Gongming Town, Guangming District, SHENZHEN, P.R. China

Name and address of the manufacturer

LIONWAY ELECTRONICS CO., LIMITED
NO. 120, MinSheng Road, Shangcun,
Gongming Town, Guangming District, SHENZHEN, P.R. China

Name and address of the factory

LIONWAY ELECTRONICS CO., LIMITED
NO. 120, MinSheng Road, Shangcun,
Gongming Town, Guangming District, SHENZHEN, P.R. China

Ratings and principal characteristics

AC 200-240V; 50/60Hz; ta:45°C; IP20; Class II;
For other ratings, refer to test report.

Trademark (if any)

LVL

Customer's Testing Facility (CTF) Stage used

N/A

Model / Type Ref.

LV12W; LV18W; LV24W; LV32W; LV36W; LV45W

Additional information (if necessary may also be reported on page 2)

see also test report ref no. 50302200 001.

A sample of the product was tested and found to be in conformity with

IEC 60598-2-1:1979+A1
IEC 60598-1:2014+A1

As shown in the Test Report Ref. No. which forms part of this Certificate

50302200 001

This CB Test Certificate is issued by the National Certification Body

TÜV Rheinland

®

TÜV Rheinland LGA Products GmbH
Tillystraße 2 - 90431 Nürnberg, Germany
Phone + 49 221 806-1371
Fax + 49 221 806-3835
Mail: cert-validity@de.tuv.com
Web: www.tuv.com

TÜV Rheinland

®

TÜV Rheinland LGA Products GmbH
Tillystraße 2 - 90431 Nürnberg, Germany
Phone + 49 221 806-1371
Fax + 49 221 806-3835
Mail: cert-validity@de.tuv.com
Web: www.tuv.com

Date: 07.01.2020

Signature: Dipl.-Ing. Ulv. S. O. Steinke

CERTIFICATE

of Conformity

Low Voltage Directive 2014/35/EU

Registration No.: AN 50456809 0001

Report No.: 50302201 001

Holder: LIONWAY ELECTRONICS CO., LIMITED
NO. 120, MinSheng Road, Shangcun,
Gongming Town, Guangming District,
Shenzhen
P. R. China

Product: Fixed Luminaire
(Surface Ceiling light)

Identification: Type Designation: LV12W LV18W LV24W
LV32W LV36W LV45W (LVL)
Serial No.: n.s.
Remark: Refer to test report 50302201 001 for details.

This certificate of conformity is based on an evaluation of a sample of the above mentioned product. Technical Report and documentation are at the Licence Holder's disposal. This is to certify that the tested sample is in conformity with Annex I of Council Directive 2014/35/EU, referred to as the Low Voltage Directive. This certificate does not imply assessment of the series-production of the product and does not permit the use of a TÜV Rheinland mark of conformity. The holder of the certificate is authorized to use this certificate in connection with the EC declaration of conformity according to Annex IV of the Directive.

TÜV Rheinland LGA Products GmbH

TÜV Rheinland

®

TÜV Rheinland

®

Certification Body

TÜV Rheinland

®

TÜV Rheinland LGA Products GmbH
Tillystraße 2 - 90431 Nürnberg

Date 07.01.2020

Dipl.-Ing. Ulv. S. O. Steinke

CE

The CE marking may be used if all relevant and effective EC Directives are complied with.

CE

TECHNICAL TEAM

More than 12 years professional team in the lighting ,
Our team has well-experienced in lighting design, mould development and
product manufacturing.
We can develop high quality products according to customer requirement.



Head Office (Shenzhen)



Molding&injection Moulding Factory(DongGuan)

Workshop&warehousing (Zhongshan)



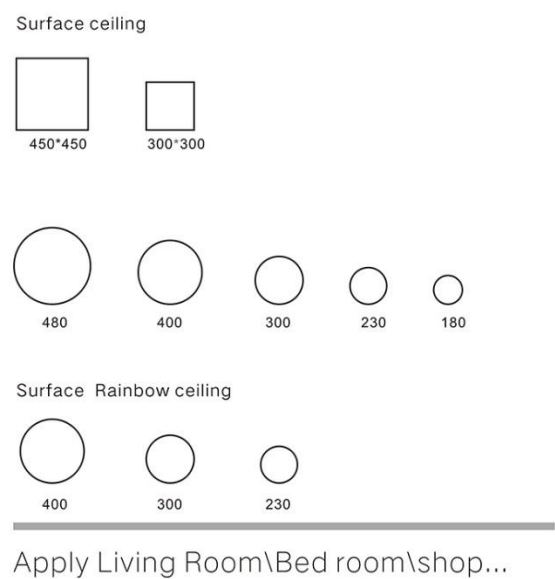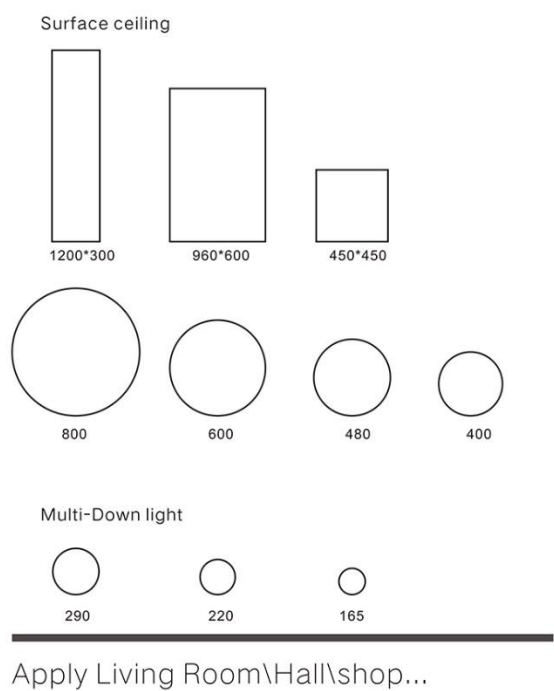

SURFACE CEILING LIGHT

LVL莱维®



APP



天猫精灵



Alexa



Google Home



DIMMABLE
Triac / 0-10V / Pre-button



Tri-Color
Pre-Button / Switch




Motion Sensor



Shell Color

Patent NO. : ZL 2019 2 0318865.0

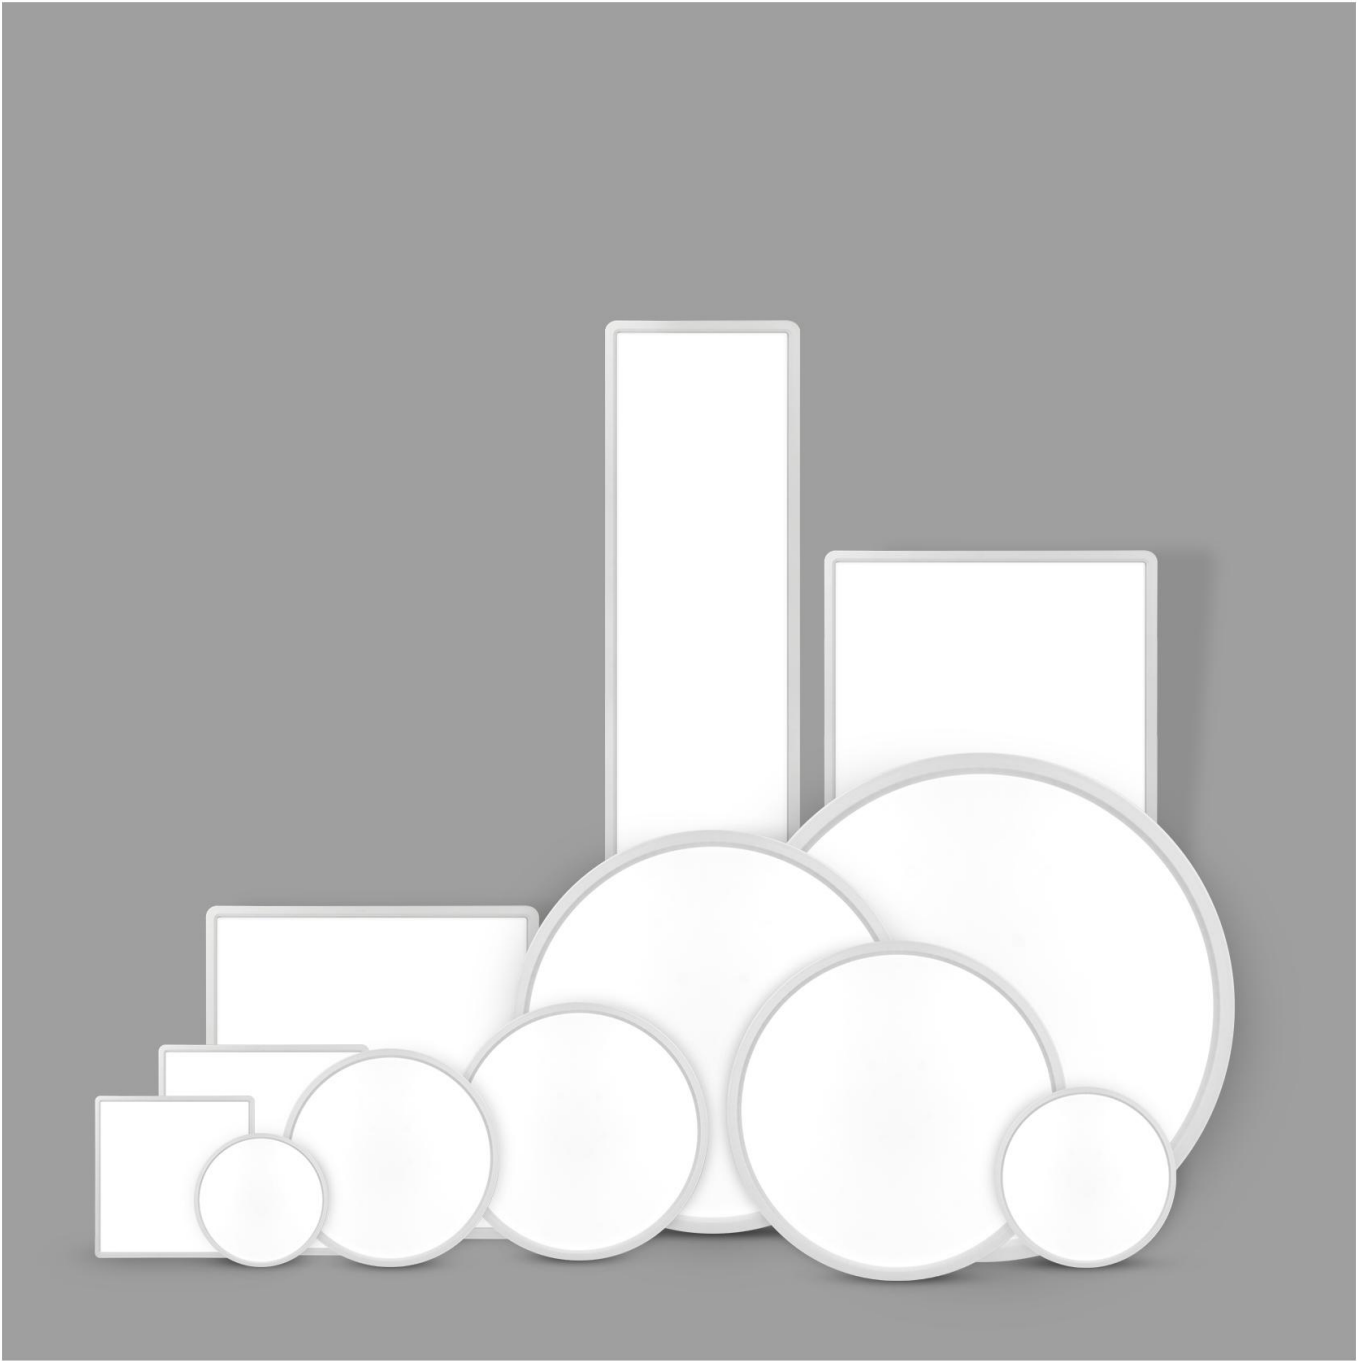

SURFACE CEILING LIGHT

LVL莱维®



Quick installation
Few seconds to
complete installation



Ultra-thin design
Only 2.4CM



Use LGP technology
Low UGR and Up to
120LM/W



SURFACE CEILING LIGHT

LVL莱维®


Patent NO. : ZL 2019 2 0318865.0

Fast Install
2.4CM ultrathin
More Than 120LM/W

/ Full Size /
18\23\30\40\48\60\80CM




DIMMABLE
Triac / 0-10V / Pre-button



Shell Color



Motion Sensor



Tri-Color
Pre-Button / Switch

Air surface ceiling light

LVL莱维®



Model	Size	Power	Lumen	CCT	LED Brand	IP Rate
LV180	Φ180*24MM	12Watts	1400-1600LM	2800K/4000K/5000K/6500K	Epistar	IP40
LV230	Φ230*24MM	18Watts	2100-2300LM	2800K/4000K/5000K/6500K	Epistar	IP40
LV300	Φ300*24MM	24Watts	3050-3200LM	2800K/4000K/5000K/6500K	Epistar	IP40
LV400	Φ400*24MM	32Watts	3600-3800LM	2800K/4000K/5000K/6500K	Epistar	IP40
LV480	Φ480*24MM	36Watts	4300-4500LM	2800K/4000K/5000K/6500K	Epistar	IP40
LV600	Φ600*24MM	45Watts	5400-5600LM	2800K/4000K/5000K/6500K	Epistar	IP40
LV800	Φ800*24MM	64Watts	8000-8300LM	2800K/4000K/5000K/6500K	Epistar	IP40




天猫精灵
TMALL GENIE



amazon alexa



works with the
Google Assistant

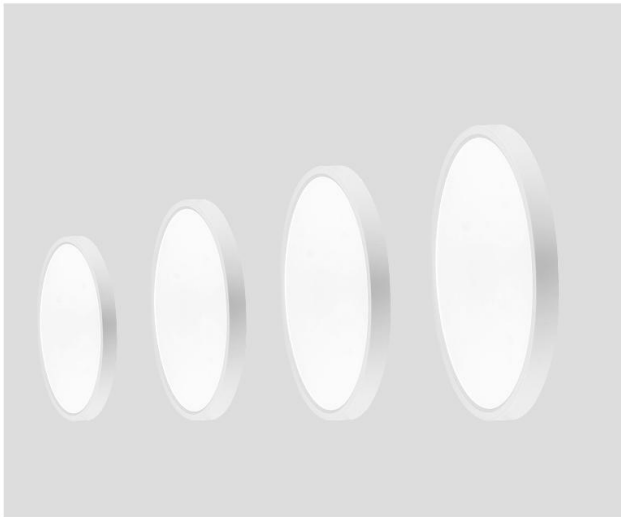

Web

www.lwl-led.com



Tel

+86-755-23696802
+86-13662585252



Wechat

13662585252



E-mail

5@lwl-led.com

REMOTE CONTROLLER SURFACE CEILING LIGHT


LVL莱维®



Model	Size	Power	Lumen	CCT	CRI	LED Brand	IP Rate
LV230SF	Φ230*24MM	18Watts	2100-2300LM	2800-6500K	>Ra80	Epistar	IP40
LV300SF	Φ300*24MM	25Watts	3050-3200LM	2800-6500K	>Ra80	Epistar	IP40
LV400SF	Φ400*24MM	32Watts	3600-3800LM	2800-6500K	>Ra80	Epistar	IP40
LV480SF	Φ480*24MM	36Watts	4300-4500LM	2800-6500K	>Ra80	Epistar	IP40
LV600SF	Φ600*24MM	45Watts	5400-5600LM	2800-6500K	>Ra80	Epistar	IP40
LV800SF	Φ800*24MM	64Watts	7500-7800LM	2800+6500K	>Ra80	Epistar	IP40

SMART SURFACE CEILING LIGHT

LVL莱维®

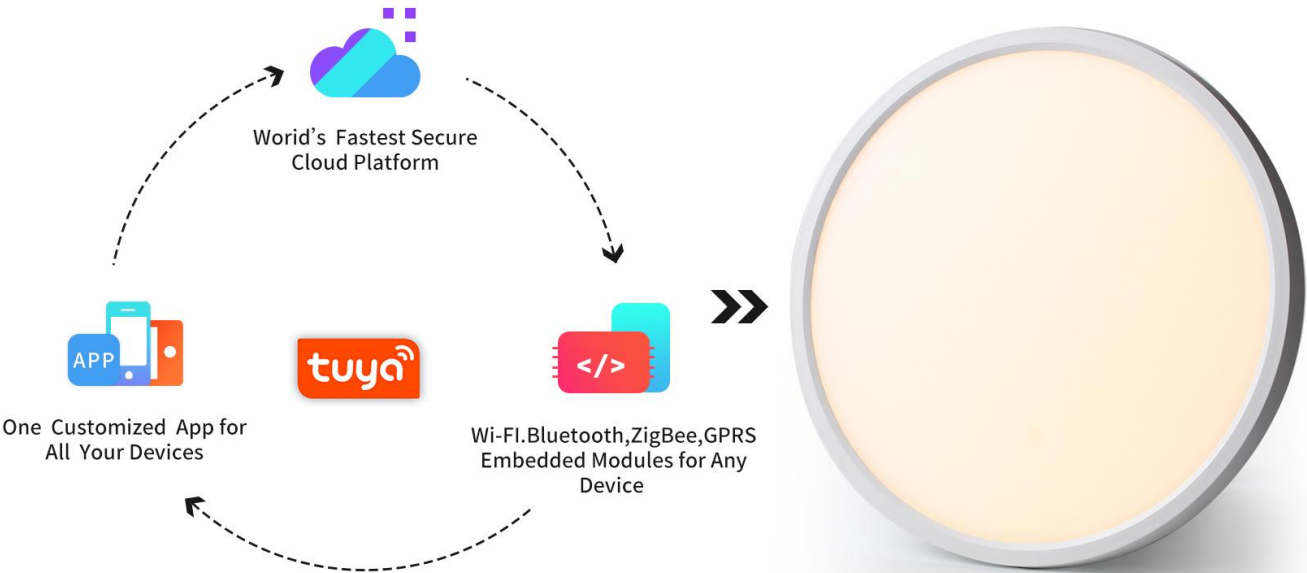

amazon alexa



works with the Google Assistant

Model	Size	Power	Lumen	CCT	CRI	LED Brand	IP Rate
LV230S	Φ230*24MM	18Watts	2100-2300LM	2800-6500K	>Ra80	Epistar	IP40
LV300S	Φ300*24MM	25Watts	3050-3200LM	2800-6500K	>Ra80	Epistar	IP40
LV400S	Φ400*24MM	32Watts	3600-3800LM	2800-6500K	>Ra80	Epistar	IP40
LV480S	Φ480*24MM	36Watts	4300-4500LM	2800-6500K	>Ra80	Epistar	IP40
LV600S	Φ600*24MM	45Watts	5400-5600LM	2800-6500K	>Ra80	Epistar	IP40
LV800S	Φ800*24MM	64Watts	7500-7800LM	2800+6500K	>Ra80	Epistar	IP40

Web
www.lwl-led.com

Tel
+86-755-23696802
+86-13662585252

Wechat
13662585252

E-mail
5@lwl-led.com

Surface Ceiling Light- Microwave

LVL莱维®




SURFACE MOUNTING CEILING LIGHT- MICROWAVE

Model	Size	Power
LV180	Φ180*24MM	12Watts
LV230	Φ230*24MM	18Watts
LV300	Φ300*24MM	24Watts

Lumen	CCT	CRI
1400-1600LM	2800K/4000K/5000K/6500K	>Ra80
2100-2300LM	2800K/4000K/5000K/6500K	>Ra80
2700-2900LM	2800K/4000K/5000K/6500K	>Ra80

LED Brand	Beam Angle	IP Rate
Epistar	120°	IP40
Epistar	120°	IP40
Epistar	120°	IP40

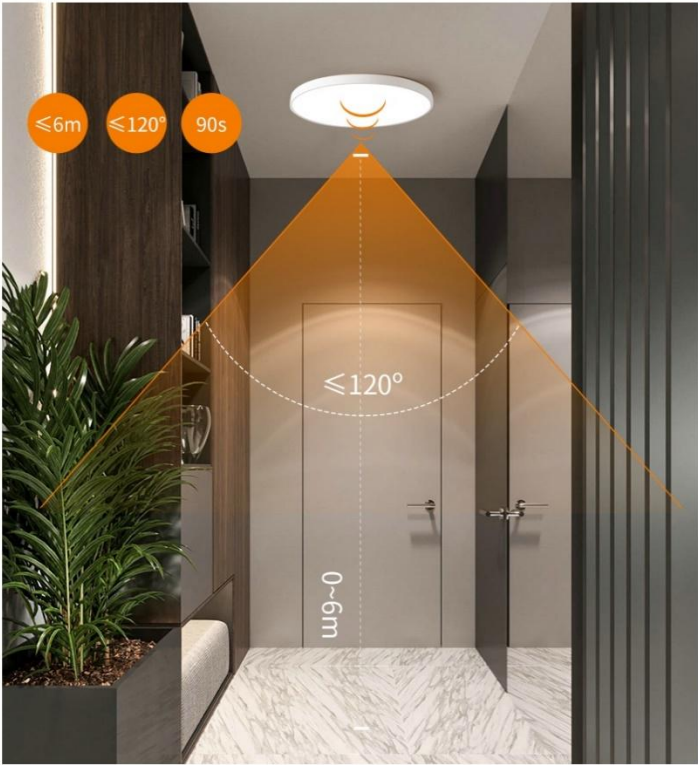

Web
www.lwl-led.com

Tel
+86-755-23696802
+86-13662585252

Wechat
13662585252

E-mail
5@lwl-led.com

Surface ceiling light-CCT

LVL莱维®



CCT adjust by Button or Switch

Model	Size	Power	Lumen	CCT	Beam Angle	LED Brand	IP Rate
LV230C	Φ230*24MM	18Watts	2100-2300LM	2800K+4000K+6500K	120°	Epistar	IP40
LV300C	Φ300*24MM	24Watts	3050-3200LM	2800K+4000K+6500K	120°	Epistar	IP40
LV400C	Φ400*24MM	32Watts	3600-3800LM	2800K+4000K+6500K	120°	Epistar	IP40
LV480C	Φ480*24MM	36Watts	4300-4500LM	2800K+4000K+6500K	120°	Epistar	IP40
LV600C	Φ600*24MM	45Watts	5400-5600LM	2800K+4000K+6500K	120°	Epistar	IP40




Surface ceiling light-Dimming

LVL莱维®




Model	Size	Power	Lumen	CCT	Beam Angle	LED Brand	IP Rate
LV180T	Φ180*24MM	12Watts	1400-1600LM	2800K/4000K/5000K/6500K	120°	Epistar	IP40
LV230T	Φ230*24MM	18Watts	2100-2300LM	2800K/4000K/5000K/6500K	120°	Epistar	IP40
LV300T	Φ300*24MM	24Watts	3050-3200LM	2800K/4000K/5000K/6500K	120°	Epistar	IP40
LV400T	Φ400*24MM	32Watts	3600-3800LM	2800K/4000K/5000K/6500K	120°	Epistar	IP40
LV480T	Φ480*24MM	36Watts	4300-4500LM	2800K/4000K/5000K/6500K	120°	Epistar	IP40
LV600T	Φ600*24MM	45Watts	5400-5600LM	2800K/4000K/5000K/6500K	120°	Epistar	IP40

TRIAC Dimmer

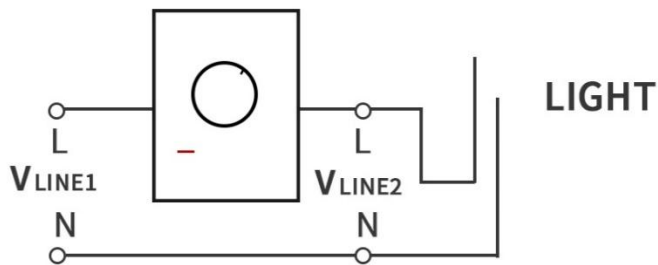

3 Step dimming

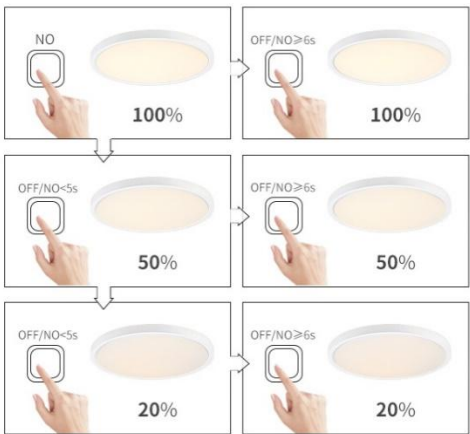

Web

www.lwl-led.com



Tel

+86-755-23696802
+86-13662585252



Wechat

13662585252



E-mail

5@lwl-led.com

LUNA SERIES SURFACE CEILING LIGHT

LVL莱维®

Fast Install
2.4CM ultrathin
More Than 120LM/W

/ Full Size /
30/40/48/60CM



天猫精灵




Alexa



Google Home



Shell Color



Tri-Color
Pre-Button / Switch



DIMMABLE
Triac / Pre-button/off

LUNA SERIES SURFACE CEILING LIGHT

LVL莱维®



Normal Type

Model	Size	Power	Lumen	CCT	LED Brand	Driver Type	CRI	Beam Angle	IP Rate
LV300L	Φ300*24MM	24Watts	2800-2900LM	2800K/4000K/ 5000K/ 6500K	Epistar	Normal	>Ra80	120°	IP40
LV400L	Φ400*24MM	32Watts	3600-3800LM	2800K/4000K/ 5000K/ 6500K	Epistar	Normal	>Ra80	120°	IP40
LV480L	Φ480*24MM	36Watts	4300-4500LM	2800K/4000K/ 5000K/ 6500K	Epistar	Normal	>Ra80	120°	IP40
LV600L	Φ600*24MM	45Watts	5400-5600LM	2800K/4000K/ 5000K/ 6500K	Epistar	Normal	>Ra80	120°	IP40

Dimmable Type By Triac dimmer or Switch ON\OFF



Model	Size	Power	Lumen	CCT	LED Brand	Driver Type	CRI	Beam Angle	IP Rate
LV300LT	Φ300*24MM	24Watts	2800-2900LM	2800K/4000K/ 5000K/ 6500K	Epistar	Dimmable	>Ra80	120°	IP40
LV400LT	Φ400*24MM	32Watts	3600-3800LM	2800K/4000K/ 5000K/ 6500K	Epistar	Dimmable	>Ra80	120°	IP40
LV480LT	Φ480*24MM	36Watts	4300-4500LM	2800K/4000K/ 5000K/ 6500K	Epistar	Dimmable	>Ra80	120°	IP40
LV600LT	Φ600*24MM	45Watts	5400-5600LM	2800K/4000K/ 5000K/ 6500K	Epistar	Dimmable	>Ra80	120°	IP40

Web
www.lwl-led.com

Tel
+86-755-23696802
+86-13662585252

Wechat
13662585252

E-mail
5@lwl-led.com

LUNA SERIES SURFACE CEILING LIGHT

LVL莱维®



Smart type by TUYA APP work with Echo or Google home

amazon alexa

works with the Google Assistant

tuyan

Model	Size	Power	Lumen	CCT	LED Brand	Driver Type	CRI	Beam Angle	IP Rate
LV300LS	Φ300*24MM	24Watts	2800-2900LM	2800K - 6500K	Epistar	Smart	>Ra80	120°	IP40
LV400LS	Φ400*24MM	32Watts	3600-3800LM	2800K - 6500K	Epistar	Smart	>Ra80	120°	IP40
LV480LS	Φ480*24MM	36Watts	4300-4500LM	2800K - 6500K	Epistar	Smart	>Ra80	120°	IP40
LV600LS	Φ600*24MM	45Watts	5400-5600LM	2800K - 6500K	Epistar	Smart	>Ra80	120°	IP40

Tri-Color adjust by Pre-set button or Switch

W

P

C

2800K

4000K


6500K

Model	Size	Power	Lumen	CCT	LED Brand	Driver Type	CRI	Beam Angle	IP Rate
LV300LC	Φ300*24MM	24Watts	2800-2900LM	2800K +4000K + 6500K	Epistar	Tri-Color	>Ra80	120°	IP40
LV400LC	Φ400*24MM	32Watts	3600-3800LM	2800K +4000K + 6500K	Epistar	Tri-Color	>Ra80	120°	IP40
LV480LC	Φ480*24MM	36Watts	4300-4500LM	2800K +4000K + 6500K	Epistar	Tri-Color	>Ra80	120°	IP40
LV600LC	Φ600*24MM	45Watts	5400-5600LM	2800K +4000K + 6500K	Epistar	Tri-Color	>Ra80	120°	IP40


SURFACE CEILING LIGHT

LVL莱维®

Fast Install
2.4CM ultrathin
More Than 120LM/W

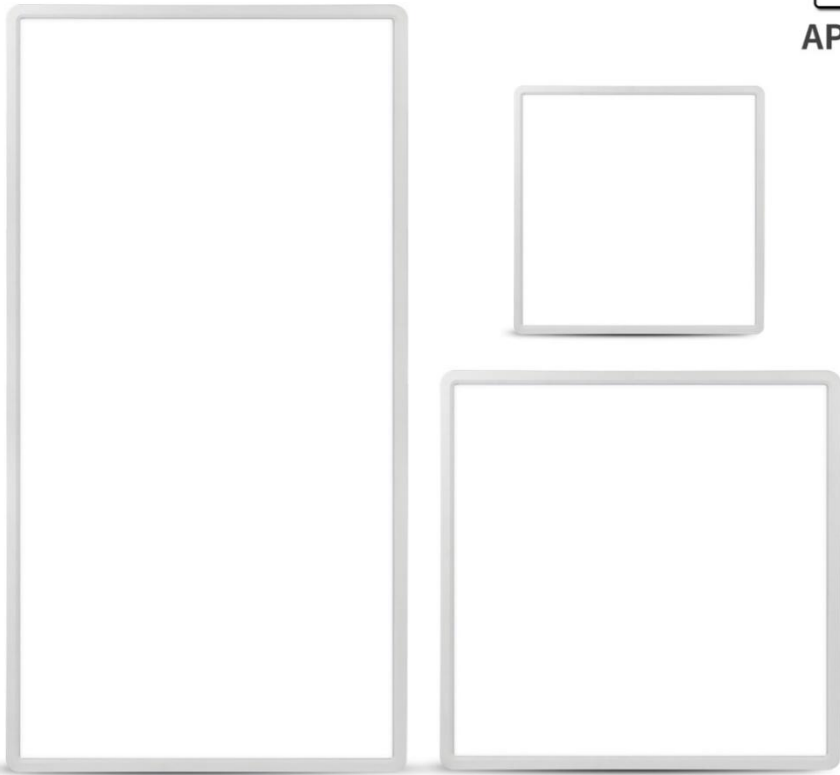

Shell Color



Tri-Color
Pre-Button / Switch




DIMMABLE

Triac / 0-10V / Pre-button

64WATT SURFACE CEILING LIGHT-RECTANGLE

LVL莱维®

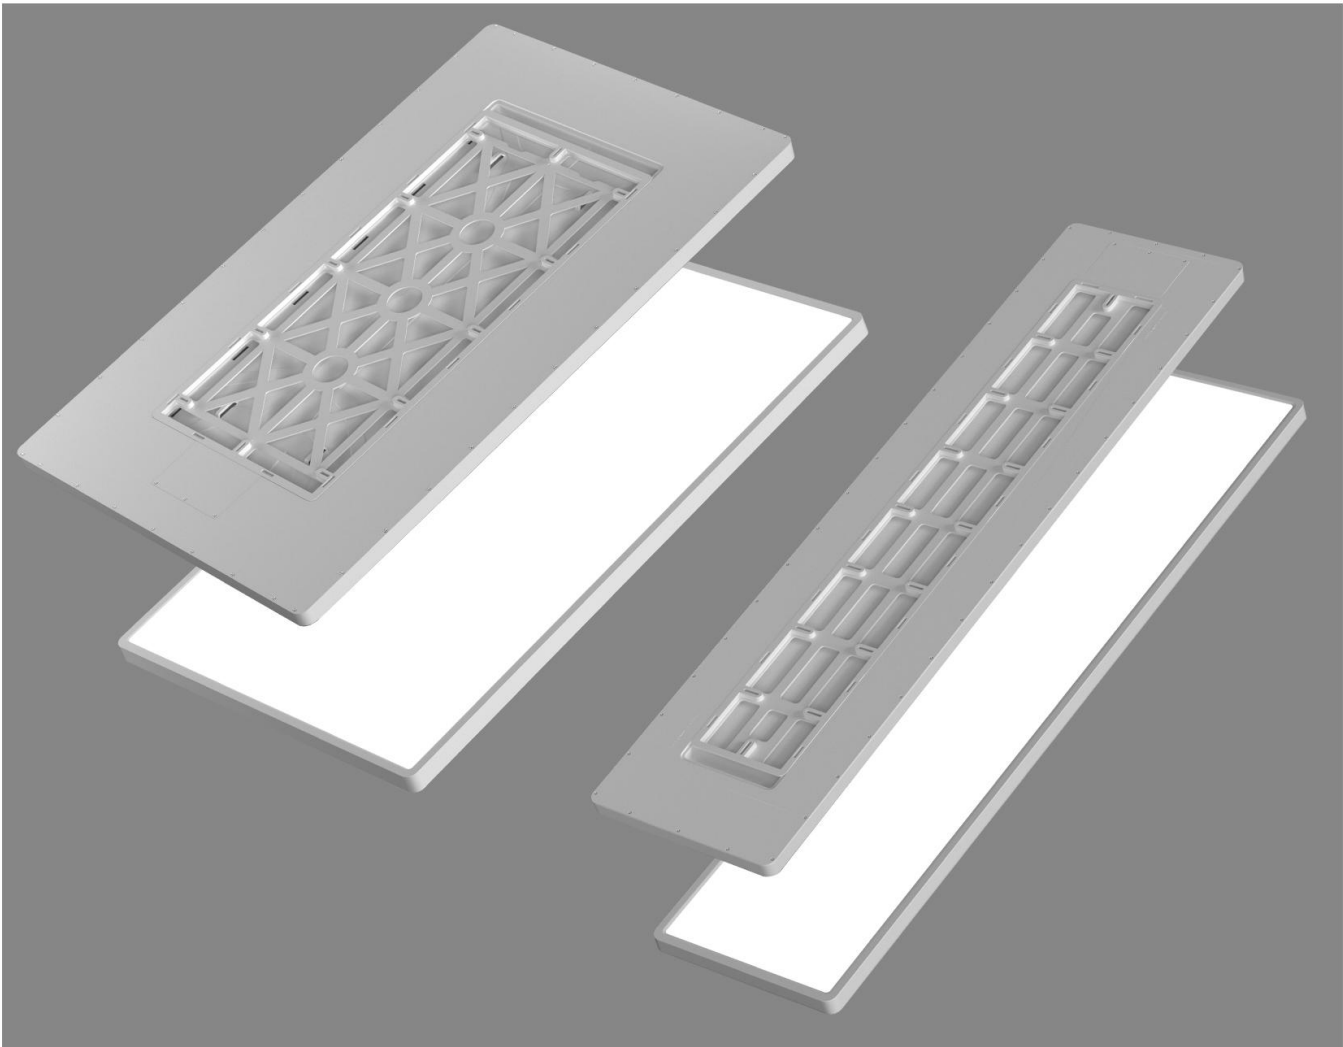

Smart type by TUYA APP work with Echo or Google home



Model	Size	Power	Lumen	CCT	LED Brand	DriverType	CRI	Beam Angle	IP Rate
LV960S	L960*W600* H24MM	64Watt	7500-7800LM	2800K + 6500K	Epistar	Smart	>Ra80	120°	IP40

Smart type by TUYA APP work with Echo or Google home



Model	Size	Power	Lumen	CCT	LED Brand	DriverType	CRI	Beam Angle	IP Rate
LV1200S	L1200*W300* H24MM	64Watt	7500-7800LM	2800K + 6500K	Epistar	Smart	>Ra80	120°	IP40

Web

www.lwl-led.com

Tel

+86-755-23696802
+86-13662585252

Wechat

13662585252

E-mail

5@lwl-led.com

SURFACE CEILING LIGHT-SQUARE

LVL莱维®



Smart type by TUYA APP work with Echo or Google home



Model	Size	Power	Lumen	CCT	LED Brand	Driver Type	CRI	Beam Angle	IP Rate
LF300S	L300*W300 *H24MM	24Watts	3050-3200LM	2800K/4000K/	Epistar	Smart	>Ra80	120°	IP40

Smart type by TUYA APP work with Echo or Google home



Model	Size	Power	Lumen	CCT	LED Brand	Driver Type	CRI	Beam Angle	IP Rate
LV450S	L450*W450 *H24MM	45Watts	5400-5600LM	2800K - 6500K	Epistar	Smart	>Ra80	120°	IP40

LWL莱维®



LIONWAY ELECTRONICS CO.,LIMITED

Head Office :

15F,NO.120,MinShengRoad,shangcun ,Gongming Town,GuangMing District, Shenzhen City

TEL:+86-755-23696802

Workshop&warehousing :

4F,Huayu Industrial Zoo,Tongshun Road ,Guzhen Town,Zhongshan City

TEL: +86-0760-88965002

Web site: <http://www.lwl-led.com/> E-mail: 5@lwl-led.com